


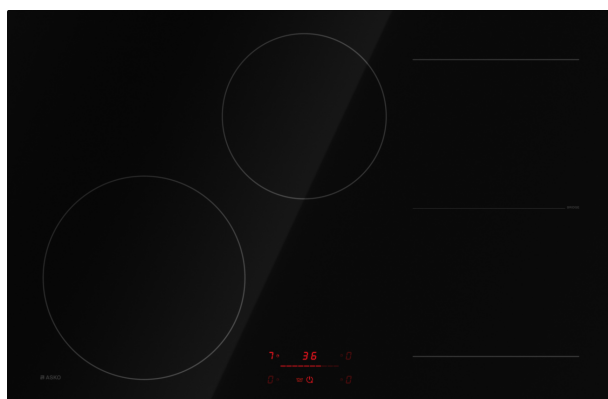

Induction hob

HI2842FBG1

Series 2

Flexible Bridge Induction™ Technology

Installation: Built-in

Black

Construction and performance

- Frame design: Without frame
- Number of cooking zones: 4
- PowerBoost function: Yes
- Front left zone type: Induction heater
- Front left zone dimension: 250
- Front left zone power: 2300 W
- Front left zone boost power: 3000 W
- Front right zone type: Square zone Real Bridge™
- Front right zone dimension: 210X190
- Front right zone power: 2100 W
- Front right zone boost power: 3000 W
- Cooking zone middle behind: Induction heater
- Ø middle behind (mm): 200
- Cooking zone power middle behind: 2300 W
- Cooking zone boost power middle behind: 3000 W
- Rear right zone type: Square zone Real Bridge™
- Rear right zone dimension: 210X190
- Rear right zone power: 2100 W
- Rear right zone boost power: 3000 W

Use and flexibility

- Bridge function: Flexible Bridge Induction™ Technology
- Functions: Bridge Induction, Boiling
- Pot detection: AutoDetect

Interaction and control

- Control panel: Touch control

Design and integration

- Edges: Soft cut edges
- Min. niche width: 750 mm
- Width of niche size for installation max.: 752 mm
- Min. niche height: 70 mm
- Depth (incl. wall spacing): 490 mm
- Type of hob installation: Top & flush built-in installation

Safety and maintenance

- Residual heat indicator: Yes

Technical data

- Voltage (V): 220-240 V
- Frequency: 50-60 Hz
- Time needed for the appliance to reach the applicable low power mode or condition: 1 min
- Power consumption in standby mode of hob: 0.5 W

Dimensions

- Height: 54 mm
- Width: 800 mm
- Depth: 520 mm
- Net weight: 10 kg

Logistic information

- Packaging height: 140 mm
- Packaging width: 880 mm
- Packaging depth: 590 mm
- Gross weight: 12.2 kg
- Product code: 744748
- EAN code: 3838782883323

