


**Series 2, Slideout rangehood, 60 cm,
Silver metallic
DFM064W54A**

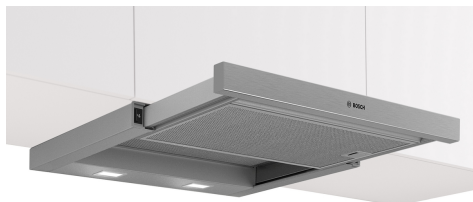

DSZ4682	Handle strip white
DSZ4686	Handle strip black
DWZ1IT1B4	Clean Air Standard odor filter (repl.)
DWZ1IT1I4	Clean Air Standard recirculation kit

**Slideout rangehood: barely visible
integrated in the wall unit, this ensures a
sleek and clear kitchen finish.**

- **Three power levels:** for flexible cooking performance.
- **Metal grease filters:** capture grease and are easy to clean for fresher air.
- **LED lighting:** energy-efficient LED lighting for bright, even cooktop illumination.

Typology: Pull-out
 Length electrical supply cord: 175 cm
 Required niche size for installation (HxWxD): ... 162mm x 526.0mm x 290mm mm
 Minimum distance above an electric cooktop: 600 mm
 Minimum distance above a gas cooktop: 650 mm
 Net weight: 8.7 kg
 Type of control: mechanical
 Number of power settings: 3
 Max. air extraction: 388 m³/h
 Max. air recirculation: 257 m³/h
 Number of lights: 2
 Noise level: 67 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 EAN code: 4242005252435
 Connection rating: 108 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: AU plug
 Installation type: Built-in



4 242005 252435

**Series 2, Slideout rangehood, 60 cm,
Silver metallic
DFM064W54A**

**Slideout rangehood: barely visible
integrated in the wall unit, this ensures a
sleek and clear kitchen finish.**

-
- Appliance width: 598 mm
 - Install into a 60cm wide upper kitchen cabinet
 - Suitable for ducted or recirculated extraction
 - Accessory required for recirculated extraction: Recirculating kit

Design

- Appliance colour: metallic silver

Comfort

- 3 power settings
- rocker switch for power and light
- Automatic On/Off operation when telescopic canopy is pulled out and pushed back
- 2 x LED Lights
- Colour Temperature: 3500 K

Cleaning

- Dishwasher safe metal grease filters
- Cassette with alu frame

Performance

- Extraction rate exhaust air according to EN 61591: max. 389 m³/h
- Noise min./max. Normal Level: 59/67 dB
- Average Energy Consumption: 40.3 kWh/year
- 1 single inlet horizontal, Capacitor motor

Planning and installation information

- Appliance dimensions (HxWxD): 203 x 598 x 290 mm
- Installation dimensions (HxWxD): 162 x 526 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

Consumption Data

- Power rating: 108 W

**Series 2, Slideout rangehood, 60 cm,
Silver metallic
DFM064W54A**

