

## Series 6, integrated rangehood, 70 cm, Black DLN77AC60A



**The undermount rangehood offers you flexibility in your kitchen planning, all with sleek styling and excellent performance – now in a brand new black colour, matching modern kitchens with Induction, Ceramic, and black-glass Gas Cooktops.**

- **Seamless integration:** thanks to near flush installation, the canopy rangehood is almost invisible in upper cabinets.
- **LED Illumination:** The energy-saving lighting provides a clear and bright illumination for the hob area.
- **Push button control:** effortless hood operation with real push buttons.
- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- **Intensive speed setting with reset:** automatically resets the hood to normal speed setting

DHZ5316	Standard odor filter (replacement)
DHZ5605	Standard recirculation kit
DWZ0IT0P0	Long Life odor filter (replacement)
DWZ1IT1D1	Long Life recirculation kit external
DWZ1IX1B6	Clean Air Plus odor filter (replacement)
DWZ1IX1C6	Clean Air Plus recirc. kit external

Typology: ..... Built-in/Built-under  
 Length electrical supply cord: ..... 150.0 cm  
 Required niche size for installation (HxWxD): ... 345mm x 676.0mm x 264mm mm  
 Minimum distance above an electric cooktop: ..... 600 mm  
 Minimum distance above a gas cooktop: ..... 650 mm  
 Net weight: ..... 11.3 kg  
 Type of control: ..... Electronic  
 Number of power settings: ..... 3-stages + intensive setting  
 Max. air extraction: ..... 595 m³/h  
 Boost position output recirculating: ..... 705 m³/h  
 Max. air recirculation: ..... 580 m³/h  
 Boost position air extraction: ..... 730 m³/h  
 Number of lights: ..... 2  
 Noise level: ..... 63 dB(A) re 1pW  
 Diameter of air outlet: ..... 120 / 150 mm  
 Grease filter material: ..... Washable aluminium  
 EAN code: ..... 4242005475636  
 Connection rating: ..... 252 W  
 Fuse protection: ..... 3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 60; 50 Hz  
 Plug type: ..... AU plug  
 Installation typology: ..... Built-in



## **Series 6, integrated rangehood, 70 cm, Black DLN77AC60A**

**The undermount rangehood offers you flexibility in your kitchen planning, all with sleek styling and excellent performance – now in a brand new black colour, matching modern kitchens with Induction, Ceramic, and black-glass Gas Cooktops.**

- Appliance dimensions (HxWxD): 345 x 700 x 282 mm
- Dimensions recirculating (HxWxD): 345-345 x 700 x 282 mm
- Installation dimensions (HxWxD): 345 x 676 x 264 mm
- Please reference the built-in dimensions provided in the installation drawings
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- with one-way flap: prevents outside air from entering your kitchen

### **Design:**

- For installation in a kitchen cabinet
- Flush-fitted installation for a seamless integration in wall cupboards.
- Suitable for ducted or re-circulated extraction
- For recirculated extraction various recirculation kits are available as optional accessories.

### **Features:**

- 2 x 1 Watt LED lights
- Colour Temperature: 4000 K
- Light Intensity: 400 lux
- Capacitor motor
- 2 metal grease filter(s).

### **Comfort Features:**

- Electronic controls with low-lift push buttons
- 3 power settings plus intensive setting
- Automatic reset from intensive to normal setting after 6 min

### **Cleaning Comfort:**

- Metal grease filter dishwasher-safe
- Easy to clean smooth surfaces and materials.

### **Performance Exhaust:**

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 270 m<sup>3</sup>/h; noise level 45 dB (A) re1pW Speed 2: extraction rate 400 m<sup>3</sup>/h; noise level 53 dB (A) re1pW Speed 3: extraction rate 595 m<sup>3</sup>/h; noise level 63 dB (A) re1pW Intensive 1: extraction rate 730 m<sup>3</sup>/h; noise level 68 dB (A) re1pW

### **Performance Recirculation:**

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory):
- Speed 1: extraction rate 250 m<sup>3</sup>/h; noise level 65 dB(A) re1pW
- Speed 2: extraction rate 350 m<sup>3</sup>/h; noise level 71 dB(A) re1pW
- Speed 3: extraction rate 400 m<sup>3</sup>/h ; noise level 74 dB(A) re1pW
- Intensive Speed 1: extraction rate 430 m<sup>3</sup>/h; noise level 75 dB (A) re1pW


### **Technical Information:**

- Power rating: 252 W
- Voltage: 220 - 240 V
- Environmentally friendly packaging


### **Planning and Installation Information:**

**Series 6, integrated rangehood, 70  
cm, Black  
DLN77AC60A**


Measurements in mm

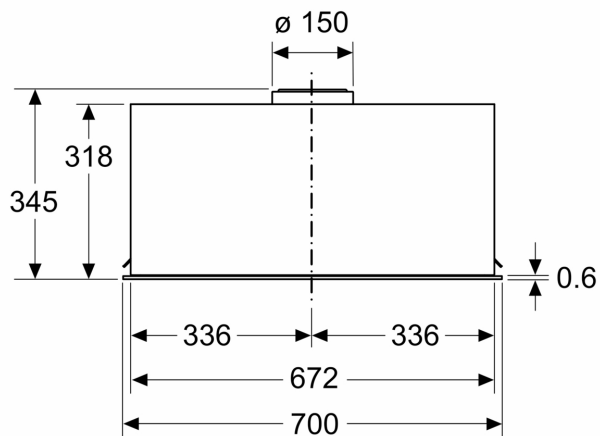


Measurements in mm

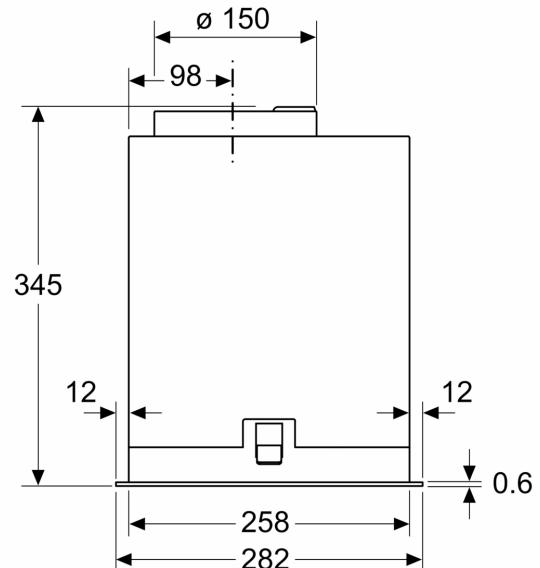

Measurements in mm

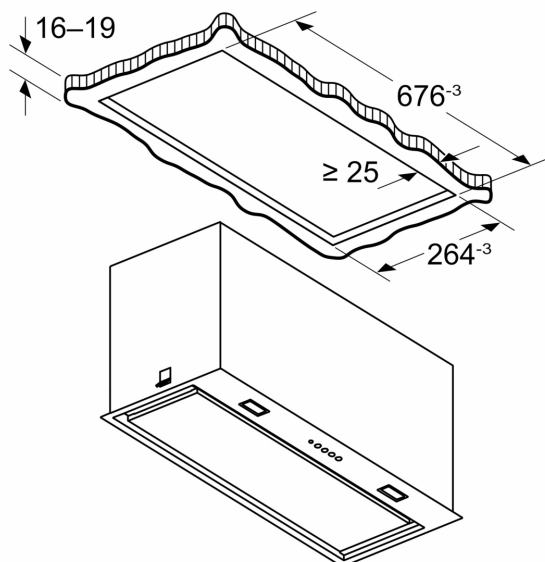

Measurements in mm

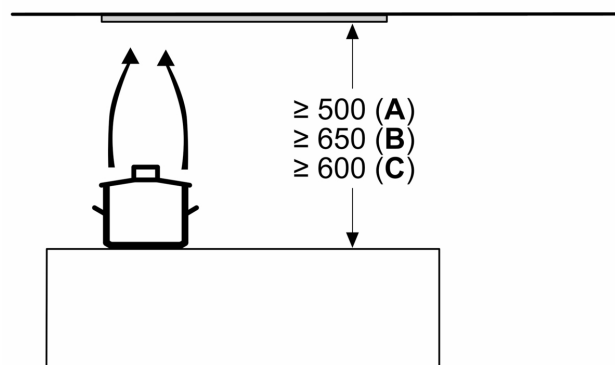

**A:** Electric

**B:** Gas - from upper edge of pan support

**C:** Electric - for Australia and New Zealand