

Gruppo Incasso Plus NRS® 60

60cm | Stainless Steel | F3GN60S2



Product Information


Motor Speed (m³/h)	800
Filter	2 x Aluminium mesh filters
Controls	Electronic control
Lighting	2 x 17W Dynamic LED (2700K - 5600K)
Speed Settings	3 Speed + boost
Timer Function	15 min auto shut-off
Ducting	150mm circular outlet
Grease Filter Alarm	Yes
Dishwasher Safe Filters	Yes
Remote Control	Included
Charcoal Filter	Optional

Features

- Metallic grease filter, removable and washable
- Dimmable lighting
- Dynamic light
- NRS® technology for a quieter kitchen

Technical Details

Dimensions (mm)	531 (W) x 558 (H) x 293 (D)
Suitable Cooking Surface (cm)	50-90
Cut-Out (mm)	506 x 262

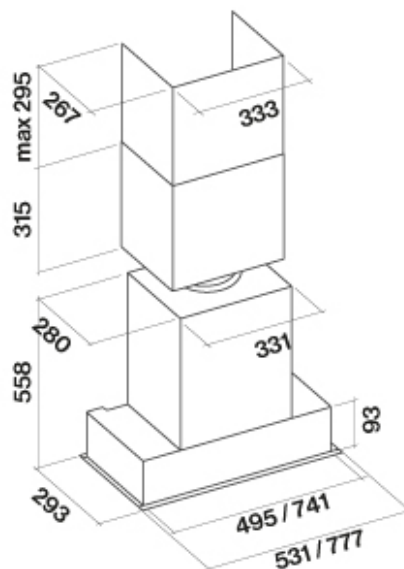

Gruppo Incasso Plus NRS® 60

60cm | Stainless Steel | F3GN60S2

Version

Plus - Built-in - 50 cm - Inox -
800 m3/h


Collection

Silence - NRS

EAN code

8034122367200

ENERGY LABEL

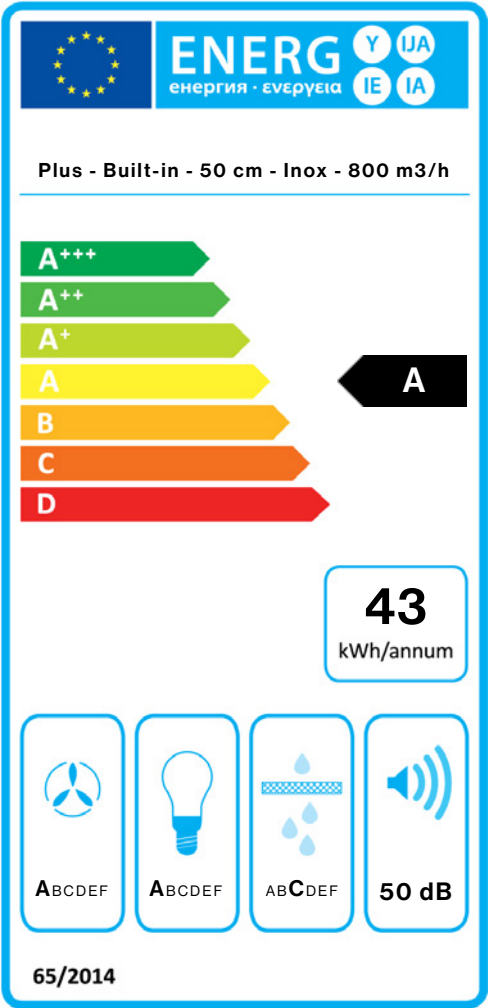

PF		
S	Falmec Spa	
M	Plus - Built-in - 50 cm - Inox - 800 m3/h	
AEC	43,0	kWh/a
EEC	A	
FDE	30,7	
FDEC	A	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	270,0	m³/h
Qmax	495,0	m³/h
Qboost	604,0	m³/h
SPEmin	38	dBa
SPEmax	50	dBa
SPEboost	57	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	50,6	
Qbep	366,0	m³/h
Pbep	372	Pa
Qboost	604,0	m³/h
Wbep	123,0	W
WL	3,50	W
Emiddle	115	lux
Lwa-SPEmax	50	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency class / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.