


H 7464 BP

Built-in oven

Seamless design with food probe and LED lighting.

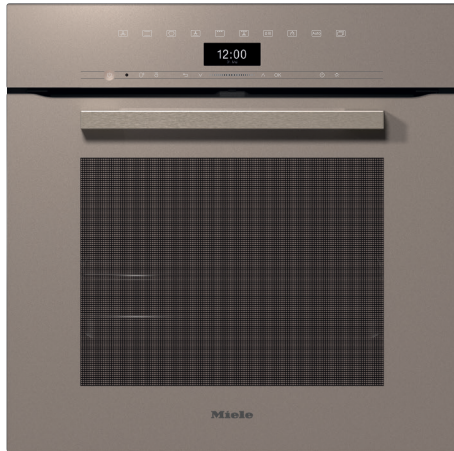

- Large clear text display with sensor controls – DirectSensor
- Minimal cleaning effort – Pyrolytic cleaning equipment & PyroFit
- Especially light dough and nicely browned crusts – Moisture Plus
- Ensures your food won't overcook – TasteControl
- Network-enabled WiFi appliance – Miele@home

EAN: 4002516931522 / Material number: 12821510

Construction type and design	
Appliance colour	Pearl Beige
Built-in oven	•
VitroLine	•
Convenience features	
TasteControl	•
Rapid Heat-up	•
Pre-heating	•
Food probe	With cable
Keeping warm	•
Crisp function	•
Operating modes	
Fan Plus	•
Conventional Heat	•
Moisture Plus	•
Moisture Plus with Auto Roast	•
Moisture Plus with Fan Plus	•
Moisture Plus with Intensive Bake	•
Moisture Plus with Conventional Heat	•
Intensive Bake	•
Auto Roast	•
Fan Grill	•
Grill	•
Bottom Heat	•
Eco Fan Heat	•
Defrosting	•
Automatic programmes	•
Country-specific Automatic programmes	•
User convenience	
Networking with Miele@home	•
Display	DirectSensor
SoftOpen	•
SoftClose	•
MultiLingua	•
Programmable timed burst of steam	•
Time of day display	•
Timer functions	•
Clock synchronisation	•
Date display	•
Minute minder	•
Programmable start of cooking duration	•
Programmable end of cooking duration	•
Programmable cooking duration	•
Actual temperature display	•
Target temperature display	•
Buzzer when desired temperature is reached	•
Recommended temperature	•
User programmes	•
Individual settings	•

H 7464 BP

Built-in oven

Seamless design with food probe and LED lighting.



EAN: 4002516931522 / Material number: 12821510

Efficiency and sustainability	
Automatic residual heat utilisation	•
Cleaning convenience	
Pyrolytic self-cleaning	•
Hinged grill element	•
CleanGlass door	•
Steam technology / Water supply	
Steam generator power in kW	1.10
Fresh water container volume in l	0.3
Suction tube for drawing in water	•
Safety	
Appliance cooling system and touch-cool front	•
Safety switch-off	•
System lock	•
Door lock during pyrolytic cleaning	•
Sensor lock	•
Technical data	
Oven interior volume in l	76
No. of shelf levels	5
Number of shelf levels oven compartment 1	5
Number of shelf levels oven compartment 2	5
Numbered shelf levels	•
Oven light	1 LED spot
Temperatures in °C	30–300
Niche width min. in mm	560
Niche width max. in mm	568
Niche height min. in mm	590
Niche height max. in mm	595
Niche depth min. in mm	550
Appliance width in mm	595
Appliance height in mm	596
Appliance depth in mm	568
Weight in kg	47.0
Total rated load in kW	3.60
Voltage in V	220-240
Frequency in Hz	50
Fuse rating in A	16
Number of phases	1
Mains cable without plug	•
Length of supply lead in m	1.50
Replacing lamps	Customer Service

H 7464 BP

Built-in oven


Seamless design with food probe and LED lighting.



EAN: 4002516931522 / Material number: 12821510


Accessories supplied	
Baking tray with PerfectClean HBB 71	1
Universal tray with PerfectClean HUBB 71	1
Baking and roasting rack PyroFit	2
PyroFit FlexiClip telescopic runners (pair)	1
Wired food probe	1
Grilling and roasting insert with PerfectClean	1
Descaling tablets	2
Available display languages	
Available display languages via MultiLingua	bahasa malaysia, dansk, deutsch, english, español, français, hrvatski, italiano, magyar, nederlands, norsk, polski, português, русский, română, slovenčina, slovensčina, srpski, suomi, svenska, türkçe, українська, čeština, ελληνικ, 中文, 日本語, 繁體中文, 한국어

H 7464 BP Installation diagrams

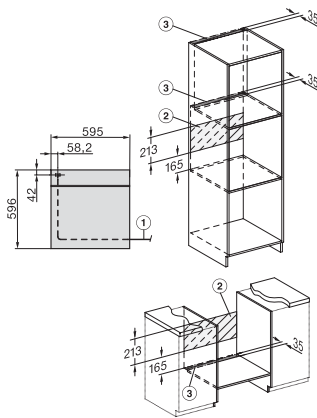


H 7000, installation drawing

- 1) Mains connection cable, L=1500 mm,
- 2) No connections permitted in this area,
- 3) Ventilation cut-out min. 150 cm²

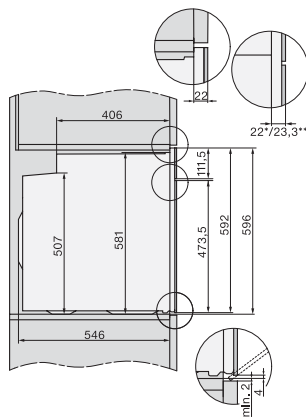


Side view H 7000, installation drawings

22 mm – glass, 23,3 mm – metal

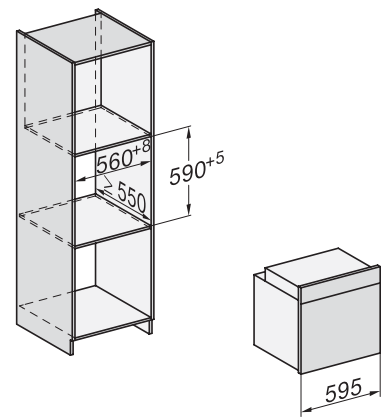


Built-in H 7000, installation drawings

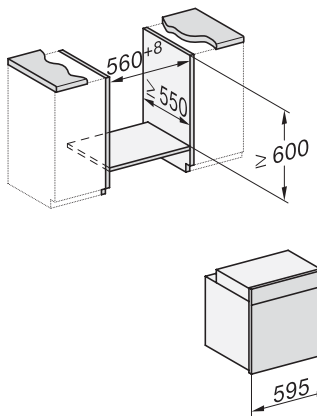


Installation H 7000 underframe, installation drawings

If the oven is to be installed under a hob, follow the instructions for installing the hob and the height of the hob.

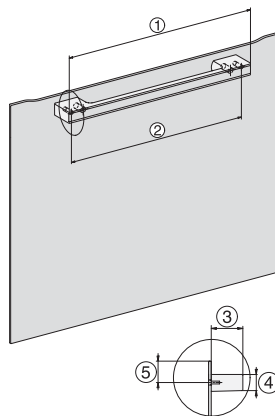


H 7000 handle, glass, installation drawings

- 1) 400 mm, 2) 360 mm, 3) 47 mm,
- 4) 27 mm, 5) 32.5 mm

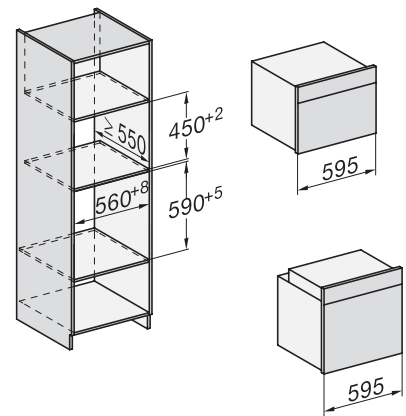


Installation with H 7000 BM, installation drawings

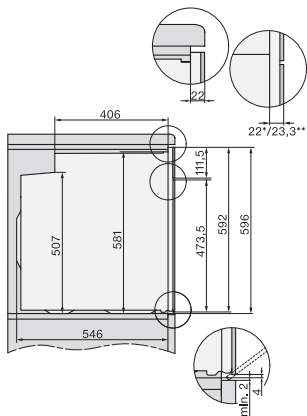


Side view H 7000 under bench, installation drawing

22 mm – glass

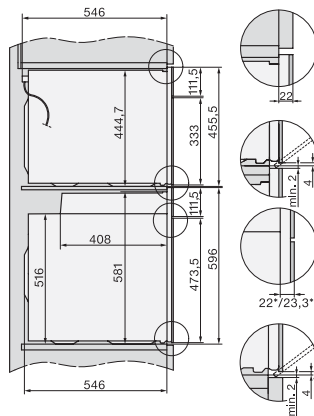

Side view, combination with H 7000 BM, installation drawings

22 mm – glass

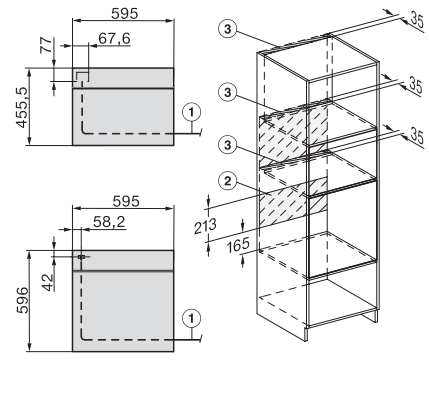

Installation, combination with H 7000 BM, installation drawings

- 1) Mains connection cable, L=2000 mm,
- 2) No connection in this area, 3) Ventilation cut-out min. 150 cm².