N 50, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY
B6ACM7AG7A

Joyful interaction: unrestricted access thanks to the retracting Hide® door, Meatprobe and Pyrolytic Self-Cleaning.

√ Hide® – The unique fully disappearing oven door.

√ Home Connect - Control your oven via the App.

√ Singlepoint Meatprobe - keeps one eye constantly on the oven temperature

√ Pyrolytic Self-Cleaning with Easy Clean: The best duo for optimal cleaning.

√ LCD-Display – simple, straightforward with large characters for clear reading

Color / Material Front: ....Graphite-Grey
Built-in / Free-standing: .... Built-in
Door opening: .... Drop down
Cleaning : ....Pyrolytic+Hydrolytic
Control Panel Material: .... Glass
Door Material: .... Glass
Dimensions (HxWxD): .... 595x594x548 mm
Dimensions of the packed product (HxWxD): . 675 x 660 x 690 mm
Required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm
Cavity dimensions: .... 357 x 480 x 415 mm
Usable volume of cavity: ....71 l
Number of interior lights: 1
Net weight: .... 39.6 kg
Gross weight: .... 42.3 kg
EAN code: 4242004281436
Connection Rating: ....3600 W
Fuse protection: ....16 A
Voltage: ....220-240 V
Frequency: ....50; 60 Hz
Length electrical supply cord: .... 120.0 cm

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CR10X0 Baking and roasting grid (standard), Z11GU20X0 Glasspan, Z11TI15X0 Cliprails, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for professional pan, enamelled, Z12CM10A0 Moussaka pan, enamelled, Z1913X0 Baking Stone, Z12CN10A0 Professional pan, enamelled, Z12CP10A0 Pizza pan, enamelled, Z12CU10A0 Multipurpose pan, enamelled, Z1365WX0 Wireless food thermometer, Z1608BX0 Full ext rails, level independent, Z1650BE0 Half tray, Z1655CA0 Air Fry & Grill tray

4 242004 281436

N 50, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY
B6ACM7AG7A

Heating Functions
- Oven with 8heating methods:
- Bread Baking, Full surface grill, CircoTherm® gentle, CircoTherm®, Top/bottom heating, Pizza Setting, Bottom heating, Circo-roasting
- Heating methods only via Home Connect App: air fry, let rest, preheating
- Temperature range 30 °C - 275 °C
- Cavity volume: 71 net usable litres

Racks and Rails
- Number of shelf levels: 4
- Large capacity oven with shelf supports, Telescopic shelf rails available as optional accessory

Design
- Graphite-Grey Edition
- Rotary Control, Retractable control knobs
- Cavity inner surface: enamel

Cleaning
- Pyrolytic self cleaning
- EasyClean® program
- Full glass inner door - safer touch door

Convenience
- White LCD display
- Electronic clock with start / stop function
- Automatic temperature proposal, automatic start, Actual temperature display, Optical temperature control, Meat probe function
- Hide®, the fully retracting oven door
- Bar handle
- Single-point meat probe
- Rapid heat-up
- Halogen lighting
- Cooling fan
- Stainless-steel fan
- Info button
- HomeConnect

Accessories
- 1 x combination grid, 1 x universal pan, 1 x enamel baking tray

Safety Features
- Maximum door temperature 30° C
- Quadruple glazed CoolTouch door
- Automatic door lock during pyrolysis, Individual adjustable child lock, Safety switch off, Residual heat indicator, Door contact switch
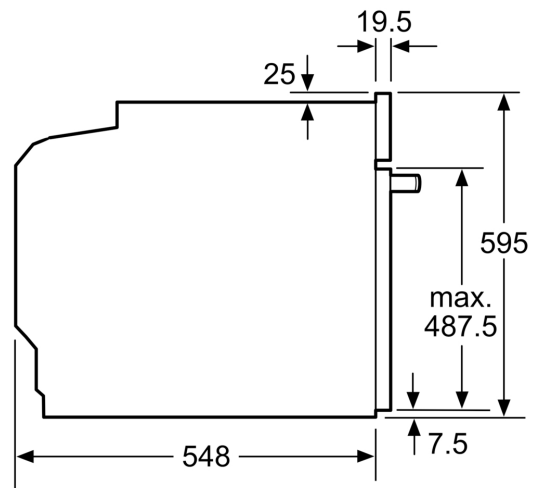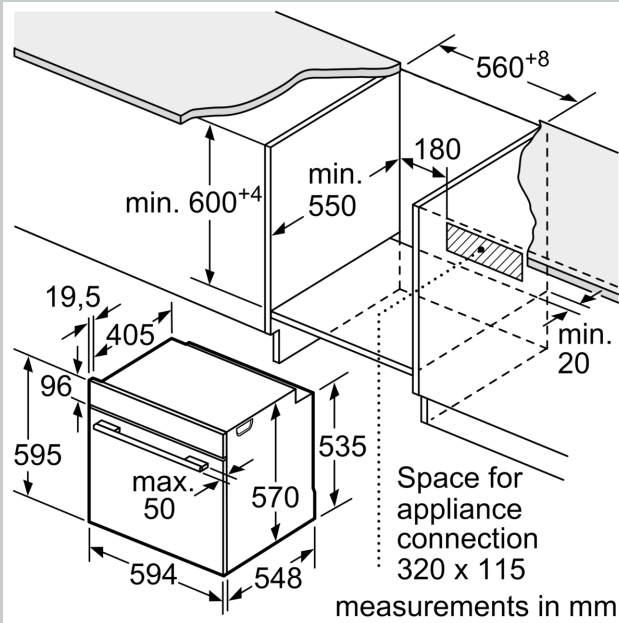
Technical Information
- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
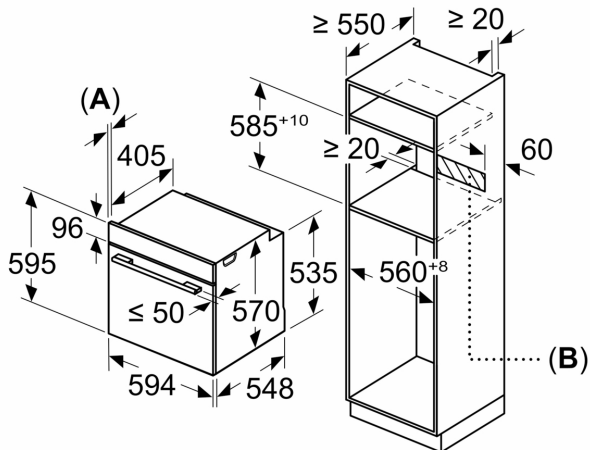- Total connected load electric: 3.6 KW

Dimensions
- Appliance dimensions (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing
- We recommend you to choose complementary products within N50, in order to assure an optimal design combination of your Built-In appliances.

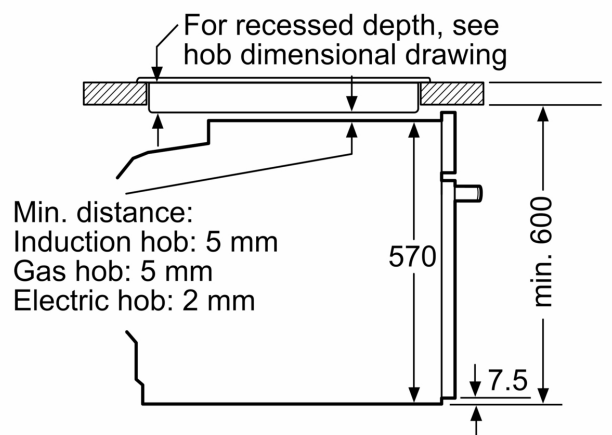## N 50, BUILT-IN OVEN, 60 X 60 CM, GRAPHITE-GREY
B6ACM7AG7A

560⁺⁸
min. 550
180
min. 600⁺⁴
19,5
405
96
595
max. 50
535
570
594
548
min. 20

Space for appliance connection 320 x 115

measurements in mm

19.5
25
595
max. 487.5
7.5
548

measurements in mm

Measurements in mm

≥ 550
≥ 20
585⁺¹⁰
≥ 20
60
(A)
405
96
595
535
560⁺⁸
≤ 50
570
594
548
(B)

A: 19.5 mm
B: Space for appliance connection 320 x 115 mm

Installation with a hob.

For recessed depth, see hob dimensional drawing

Min. distance:
Induction hob: 5 mm
Gas hob: 5 mm
Electric hob: 2 mm

570
min. 600
7.5

measurements in mm