

N 90, INTEGRATED RANGEHOOD, 70 CM, BLACK D76NPC1S0A



Your undermount rangehood fits discreetly into your cabinet for more spacious versatility in the home

- ✓ Efficient Drive Motor – Quiet and energy-efficient motor for a calmer kitchen.
- ✓ Intensive Setting – A peak performance beats steam during intense cooking with automatic revert.
- ✓ Hidden Design: Seamlessly integrate your hood in a flush fitted cupboard design.
- ✓ LED Lighting – Clear illumination while you cook.
- ✓ Dimmer Function: Easily dim the light according to your mood with the touch of a finger.

Z5135X1	Standard odor filter (replacement)
Z5135X3	Standard recirculation kit
Z51ITD1X1	Long Life recirculation kit external
Z51ITP0X0	Long Life odor filter (replacement)
Z51IXB1X6	Clean Air Plus odor filter (replacement)
Z51IXC1X6	Clean Air Plus recirc. kit external

Typology: Built-in/Built-under
 Length electrical supply cord: 150.0 cm
 Required niche size for installation (HxWxD): 345mm x 676.0mm x 264mm mm
 Minimum distance above an electric cooktop: 600 mm
 Minimum distance above a gas cooktop: 650 mm
 Net weight: 11.1 kg
 Type of control: Electronic
 Number of power settings: 3-stages + intensive setting
 Maximum output air extraction: 590 m³/h
 Boost position output recirculating: 760 m³/h
 Maximum output recirculating air: 560 m³/h
 Boost position air extraction: 800 m³/h
 Number of lights: 2
 Noise level: 61 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 EAN code: 4242004282662
 Connection Rating: 172 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 60; 50 Hz
 Plug type: AU plug
 Installation typology: Built-in



N 90, INTEGRATED RANGEHOOD, 70 CM, BLACK D76NPC1S0A

Design:

- For installation in a kitchen cabinet
- Flush-fitted installation for a seamless integration in wall cupboards.
- Suitable for ducted extraction and recirculation
- For recirculated extraction various recirculation kits are available as optional accessories.
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- with one-way flap: prevents outside air from entering your kitchen

Features:

- 2 x 1 Watt LED lights with color temperature selectable from 2 fixed values
- Softlight: the lighting elements switch on and off smoothly.
- Colour Temperature: 4000 K
- Light Intensity: 300 lux
- EfficientDrive: Efficient BLDC technology
- 2 metal grease filter(s).

Comfort Features:

- Electronic controls with low-lift push buttons
- Saturation indicator for grease filters
- Automatic after running (10 minutes)
- 3 power levels plus intensive setting
- Automatic reset from intensive to normal setting after 6 min

Cleaning Comfort:

- Metal grease filter dishwasher-safe
- Easy to clean smooth surfaces and materials.

Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 255 m³/h; noise level 41 dB (A) re1pW Speed 2: extraction rate 385 m³/h; noise level 51 dB (A) re1pW Speed 3: extraction rate 590 m³/h; noise level 61 dB (A) re1pW Intensive 1: extraction rate 800 m³/h; noise level 69 dB (A) re1pW

Performance Recirculation:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory):
- Speed 1: extraction rate 180 m³/h; noise level 56 dB(A) re1pW
- Speed 2: extraction rate 250 m³/h; noise level 62 dB(A) re1pW
- Speed 3: extraction rate 350 m³/h ; noise level 70 dB(A) re1pW
- Intensive Speed 1: extraction rate 440 m³/h; noise level 75 dB (A) re1pW

Technical Information:


- Power rating: 172 W
- Voltage: 220 - 240 V
- Expanded plastic free packaging

Planning and Installation Information:


- Appliance dimensions (HxWxD): 345 x 700 x 282 mm
- Dimensions recirculating (HxWxD): 345-345 x 700 x 282 mm
- Installation dimensions (HxWxD): 345 x 676 x 264 mm
- Please reference the built-in dimensions provided in the installation drawings

N 90, INTEGRATED RANGEHOOD, 70 CM, BLACK
D76NPC1S0A


Measurements in mm

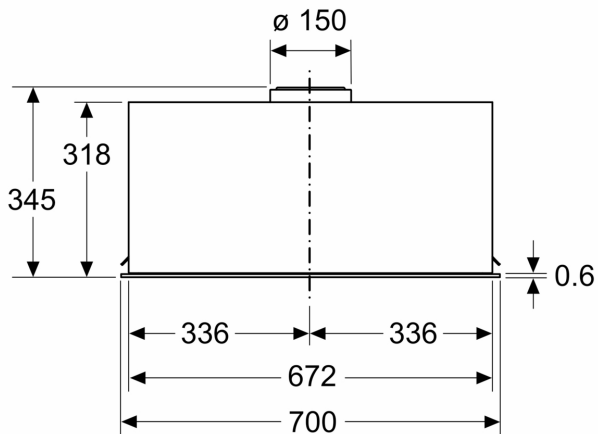


Measurements in mm

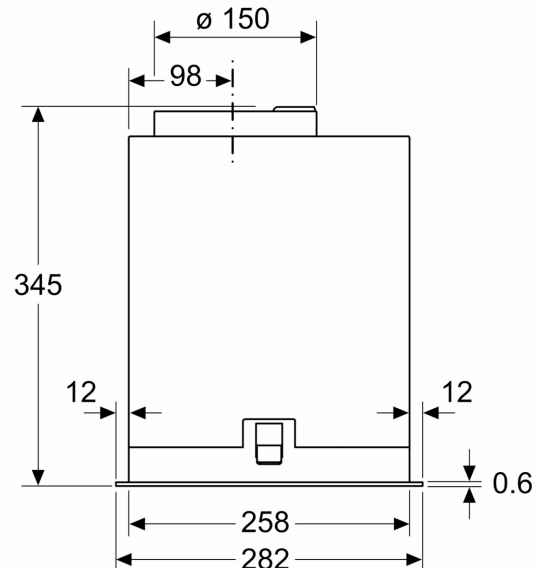

Measurements in mm

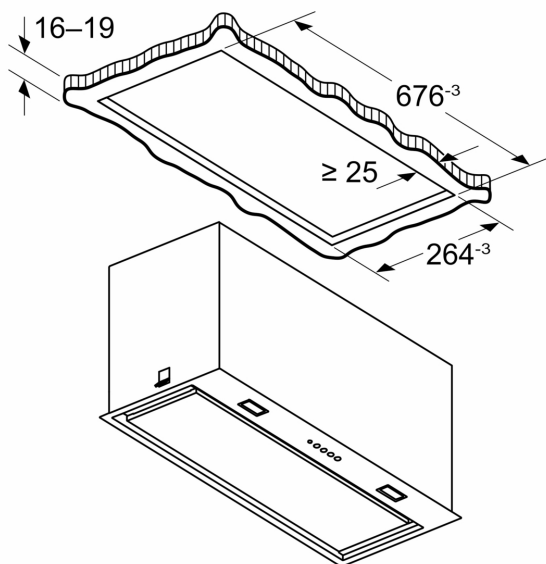

Measurements in mm

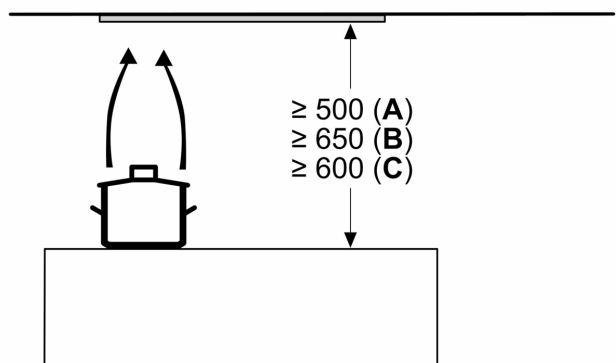

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand