

*N 70, WALL-MOUNTED CANOPY RANGEHOOD, 90 CM, STAINLESS STEEL
D95BMP5N0*



The stylish Neff canopy rangehood is modern in design and keeps up with your cooking.

- ✓ Efficient Drive Motor – Quiet and energy-efficient motor for a calmer kitchen.
- ✓ Touch Control: An integrated flat surface control panel for smooth operation with a fingerswipe.
- ✓ Intensive Speed Setting: Increases the extraction rate when cooking steam is intense.
- ✓ Dimmer Function: Easily dim the light according to your mood with the touch of a finger.
- ✓ High Extraction Rate – ensures a clear view while cooking thanks to an efficient motor technology

Z50XP0X0	Long Life odor filter (replacement)
Z51CB12X4	Clean Air Standard recirculation kit
Z51CXC2N6	Clean Air Plus recirc. kit external
Z51CX11X6	Clean Air Plus recirculation kit
Z51FXD2N1	Long Life recirculation kit external
Z51FXJ0X5	Long Life recirculation kit
Z53CBB2X4	Clean Air Standard odor filter (repl.)
Z53XXB1X6	Clean Air Plus odor filter (replacement)
Z5861N0	Back panel stainless steel
Z5895N0	Stainless steel back panel 900 mm
Z5906N1	Chimney extension 1000 mm
Z5916N1	Chimney extension 1500 mm

Color chimney:Stainless steel
 Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney:582-908/568-1018 mm
 Height of product, without chimney: 46 mm
 Minimum distance above an electric cooktop: 600 mm
 Minimum distance above a gas cooktop: 650 mm
 Net weight: 18.1 kg
 Type of control: Electronic
 Number of power settings:3-stages + 2 intensive settings
 Maximum output air extraction:427 m³/h
 Boost position output recirculating:442 m³/h
 Maximum output recirculating air: 343 m³/h
 Boost position air extraction:702 m³/h
 Number of lights:3
 Noise level:55 dB(A) re 1pW
 Diameter of air outlet:120 / 150 mm
 Grease filter material:Washable stainless steel
 EAN code:4242004234906
 Connection Rating: 145 W
 Fuse protection:10 A
 Voltage:220-240 V
 Frequency:50; 60 Hz
 Plug type:Gardy plug w/ earthing
 Installation typology:Wall-mounted



N 70, WALL-MOUNTED CANOPY RANGEHOOD, 90
CM, STAINLESS STEEL
D95BMP5N0

- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 33.8 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 45/55 dB

Design & Innovation

Power and Mode of Operation

Heating Functions

Cleaning

Safety and Quality

Convenience

Dimensions (HxWxD)

Technical Information


- Wall Hood brushed steel
- Appliance width: 898 mm
- Appliance colour: brushed steel
- Suitable for ducted extraction and recirculation
- Accessories required for recirculated extraction: Recirculating kit
- For wall mounted installation
- EASY Installation
- TouchControl for power and light
- Electronic controls
- Electronic controls with low-lift push buttons
- 3 power levels + 2 intensive levels via TouchControl
- Electronic controls via TouchControl with 2x7-segment
- 3 power levels + 2 intensive levels
- Automatic intensive revert setting - 6 min
- Automatic after running (10 minutes)
- Easy to clean Innerframe
- Softlight with Dimming function
- 3 x 1.5 Watt LED Lights
- Interval operation: the hood switches on and off in the selected setting for the selected time.
- Noise reduction
- EfficientDrive: Efficient BLDC technology
- 3 x 1.5W LED
- Light Intensity: 359 lux
- Colour Temperature: 3500 K
- Saturation display for filters
- Stainless steel filter covers, dishwasher safe
- Dishwasher safe Metal grease filters
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 427 m³/h. Intensive 702 m³/h
- Extraction rate exhaust air according to EN 61591: max. 702 m³/h

- Maximum extraction 702 m³/h
- Extraction rate exhaust air according to EN 61591:
- max. normal use 427 m³/h, intensive 702 m³/h
- Dimensions recirculating with CleanAir module (HxWxD):
- 689 x 898 x 500mm - mounting with outer chimney
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 exhaust air:
- Max. normal use: 55 dB(A) re 1 pW
- Intensive: 66 dB(A) re 1 pW
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- with one-way flap: prevents outside air from entering your kitchen
- Max. extraction rate: 702 m³/h
- Dimensions exhaust air (HxWxD): 614-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 898 x 500 mm
- Power rating: 145 W
- Electrical cable length 1.3 m
- Voltage: 220 - 240 V
- With the Clean Air Plus recirculation kit (available as accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 343 m³/h
- Intensive: 442 m³/h
- Noise level in recirculation mode: Max. normal use: 66 dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW


* In accordance with the EU-Regulation No 65/2014

N 70, WALL-MOUNTED CANOPY RANGEHOOD, 90
CM, STAINLESS STEEL
D95BMP5N0


measurements in mm

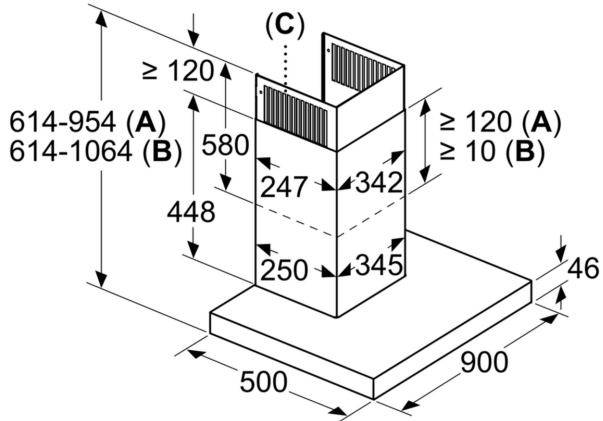

- A:** Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air
to be mounted facing down

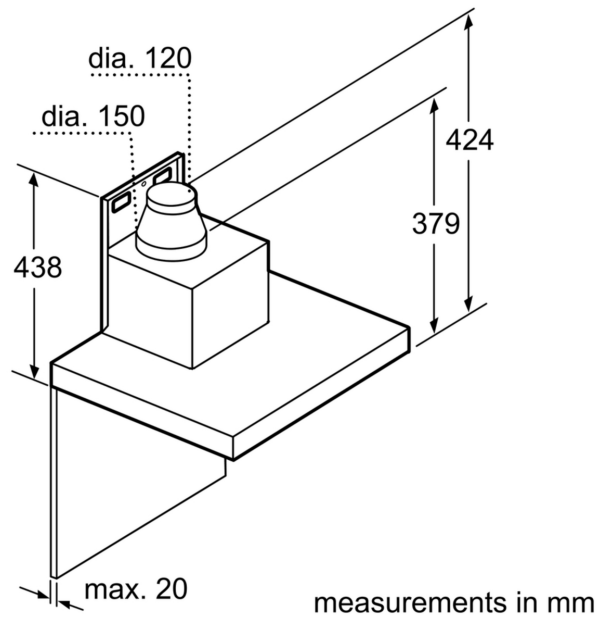


Measurements in mm

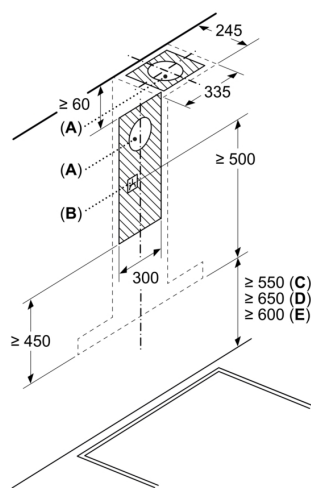

- A:** Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm

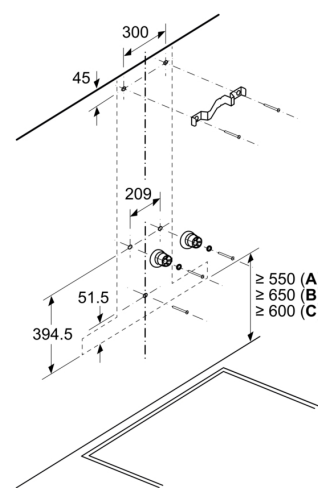

- A:** Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand