UM-9S, UM-12UMS // 90cm & 120cm // **SILENT**







With an entirely concealed design, the UM-9S and UM-12UMS stainless steel undermount rangehoods excite those who prefer a fully integrated kitchen, for a continuous flow throughout the space. Powerful silent extraction is delivered with the externally mounted, German engineered Isodrive® motor, producing efficient extraction of steam, smoke and odours, leaving kitchen air fresher.





PRODUCT DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe baffles
- 5 Year Warranty on Canopy

ISODRIVE® OPTIONS

- **ST** single external motor 900 m³/h airflow
 - 200mm SteelFlex™ ducting (4m)
 - install roof/wall
 - rated power: 57W
- **SP** single external motor
 - 1600 m³/h airflow
 - 200mm SteelFlex™ ducting (6m)
 - install roof/wall
 - rated power: 155W

TECHNICAL DATA


UM-99


- dimensions: (W x D) 864 x 295 mm
- 2 x baffles

UM-12UMS*

- dimensions: (W x D) 1200 x 295 mm
- 4 x baffles
- *Note: The SE is used only by the UM-12UMS.



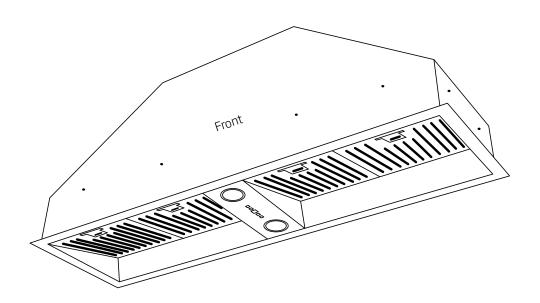

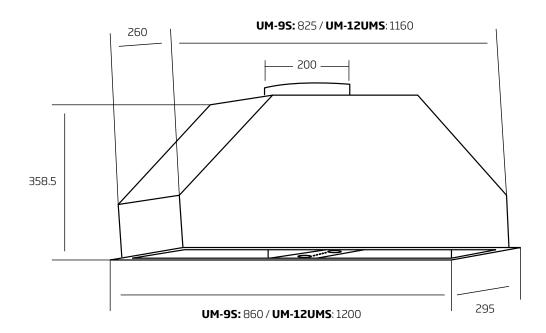

Model: UM-9S, UM-12UMS Feeding Voltage: 220-240V 50Hz

Max Lamp Power: 2 x 3W