

KPFA12BL

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709293512



Aesthetics

Aesthetic Colour	Portofino Black	Serigraphy colour Logo	Black Applied
------------------	-----------------	------------------------	---------------




Controls

Control setting	Control knobs	Control knobs	Portofino
No. of controls	2	Controls colour	Steel effect

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features

  			
No. of lights	4	No. of filters	4
Light type	LED	Anti-grease filters	Stainless steel
Light Power	4 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	650 mm
Light color temperature range	3000° - 5700° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	815 m³/h	Non return valve	Yes

Motor power 275 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	287	49
Speed 2	389	58
Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 42 kWh/a
Energy efficiency class (EEC) A+
Fluid Dynamic Efficiency (FDE) 36,3
Lighting Efficiency (LE) 74,8 lux/W
Grease Filtering Efficiency (GFE) 74,9 %
Air flow at minimum speed (Qmin) 287 m³/h
Air flow at maximum speed (Qmax) 606 m³/h
Air flow at boost speed (Qboost) 777 m³/h
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 49 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 67 dBA

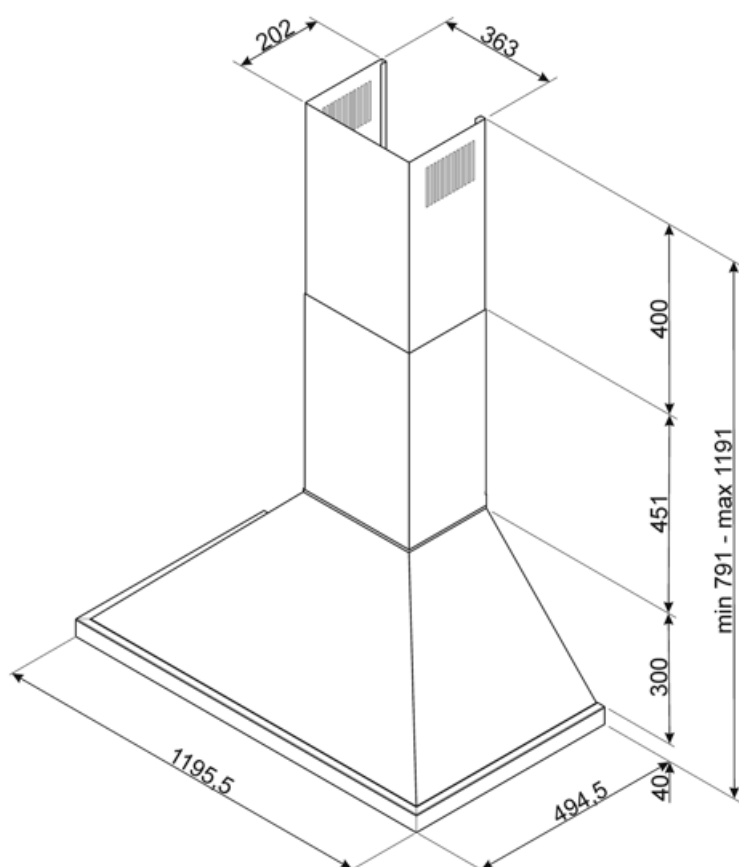
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 73 dBA
Time increase factor (F) 0,7
Energy Efficiency Index 41,4
Measured air flow rate at best efficiency point (Qbep) 400 m³/h
Measured air pressure at best efficiency point (Pbep) 490 Pa
Measured electric power input at best efficiency point (Wbep) 150 W
Nominal Power consumption of the light system (WL) 4 W
Average illumination of the light on the cooking surface (Emiddle) 329 lux
Sound power level at highest setting (Lwa) 67 dBA

Electrical Connection






Voltage 220-240 V
Frequency (Hz) 50-60 Hz
Power supply cable length 1000 mm

Also available

Alternative colours available White, Black, Stainless steel, Red, Turquoise
Available colours KPF12WH/BL/X/RD/T



Symbols glossary

	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.
	...		